



Rockland Cargo Equipment - Tuff Dawg 18' Hybrid Trash Dump Trailer with Restroom PolyJohn integrated platform

Model Name: Road Dawg 18' Hybrid Tilt Dump

- 1 12' Long x 7' Tall x 82" wide Dump Body
- 2 Sides: 3" x 2" x 11 gauge Structural Tubing
- 3 Deck Metal: 1/8" thick Tread Plate
- 4 Wall plate: 1/8" thick Tread Plate
- 5 Chassis: 6" x 2" x 3/16" Structural Tubing
- 6 Tongue: 6" x 2" x 3/16" Structural Tubing
- 7 Support Rails: 1.5" x 1.5" x 16 gauge Structural Tubing
- 8 Cross Members: C3 x 3.5# Channel Iron
- 9 7 Ton Power Hoist Telescopic 108 Kit
- 10 This system (line 2) hydraulic kit powers - move hoist tilt operation. This includes a corded remote control hand held pad from ground.
- 11 This system will be located within the storage box sitting on tongue of trailer
- 12 6' portable restroom platform - located front and just behind tongue
- 13 PolyJohn Fleet Fresh Flush installed prior to delivery
- 14 PolyJohn includes soap dispenser, interior shelf, foaming hand sanitizer dispenser
- 15 portable restroom platform includes step and hand rails (hand rails = square tubular rails surrounding platform entry + surrounding Poly John)
- 16 Trailer - Trash Compartment will be 2' Diamond Plate walls up from trailer floor on curb and street side
- 17 Trailer - Trash Compartment (all sides) above Plate - 5' width 3/4" #9 Expanded Metal. **Welded in - save construction set up costs**
- 18 Trailer Roof will be of 1.5" #13 Expanded Metal
- 19 Both Curb Side and Street Side at trailer trash compartment there will be a 3' x 3' side door opening hinged above the 2' Diamond Plate wall
- 20 Rear Trailer includes same materials as sides - split - two integrated 4' doors (one of 2' Diamond plate one of expanded metal)
- 21 Standard Axles Tandem 5200# - 10,000# GVWR - **OPTIONALLY TANDEM AXLES 7,000# 14,000 GVWR OFFERED + UPCHARGE (PER TRAILER)**
- 22 Electric Brakes with 7 way (pin) round Bargman Plug
- 23 12 volt battery for emergency stop trailer brakeaway
- 24 **Bright Way Solar Battery Charger (This is strictly an add-on option if this line item is selected by Marion County)**
- 25 Tires / wheels will be ST225/75R15 Radial - 10 ply (If Marion County selects 7,000# axle set up then tires and wheels go up to 235/80/R60 10 ply)
- 26 Spare Tire and Mount of ST225/75R included and installed on curb side mid length of trailer at the 2' diamond plate section
- 27 12,000# capacity drop leg, spring loaded tongue jack - **OPTIONALLY 12,000# HYDRAULIC JACK OFFERED + UPCHARGE (PER TRAILER)**
- 28 2 5/16" **Adjustable** Coupler
- 29 Heavy Duty Fenders - Tandem Double Break Teardrop Diamond Plate
- 30 Diamond Plate Steel Floor on 16" Centers
- 31 LED Light Pkg for DOT approved Running lights, tail and brake lights
- 32 K-Force Micro Elite 21 TIR LED Mini Light Bar installed to mounting plate - center-rear trailer top bar - electrical switch located front of trailer
- 33 Installed Hand Tool Storage rings at front of trailer and behind Polyjohn - **10 each** welded into mid rail of expanded metal section
- 34 2 each 48" car ramps will be mounted onto holders located on the street side of the trailer near mid point
- 35 Mounted Igloo Cooler holder (**complete with 10 gallon Igloo cooler**) - located behind tongue
- 36 Mounted Safety Cone holder (**complete with 6 each 28" orange cones - stacked**) - located behind tongue and opposite of Igloo
- 37 Paint Tier 1 (two part polyurethane with hardener)




Road Dawg Dump Trailer

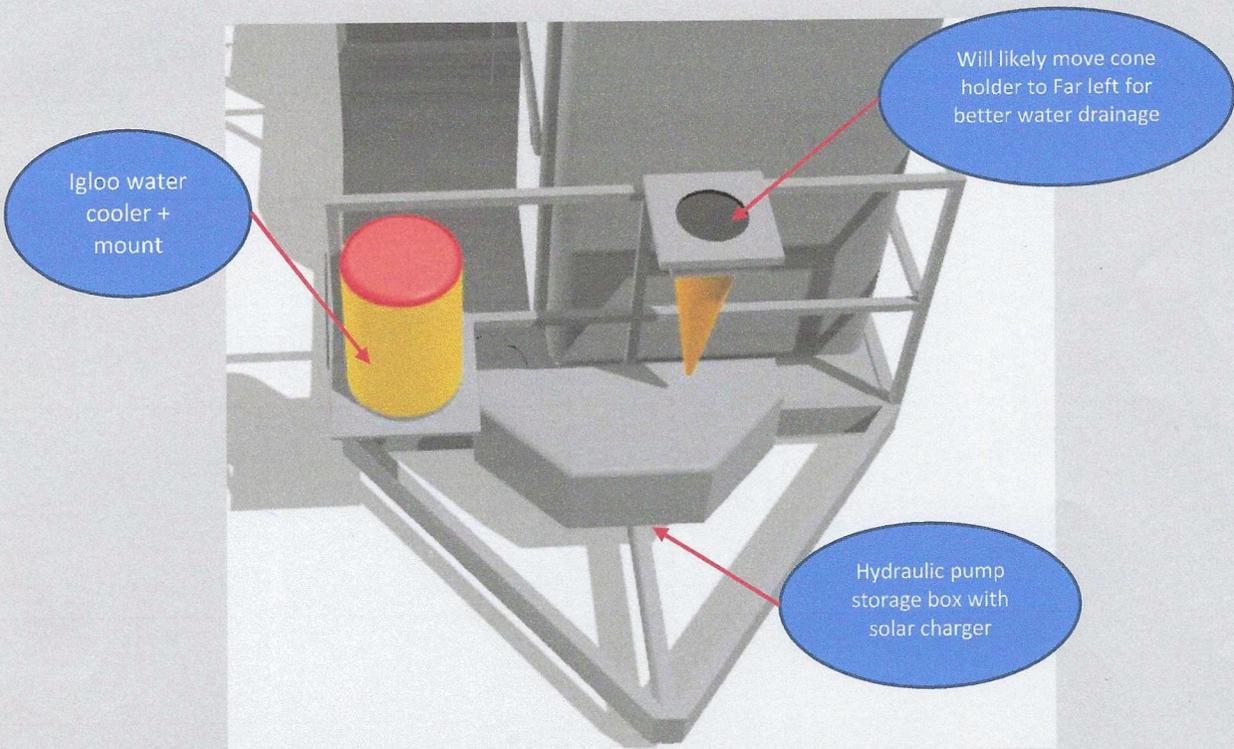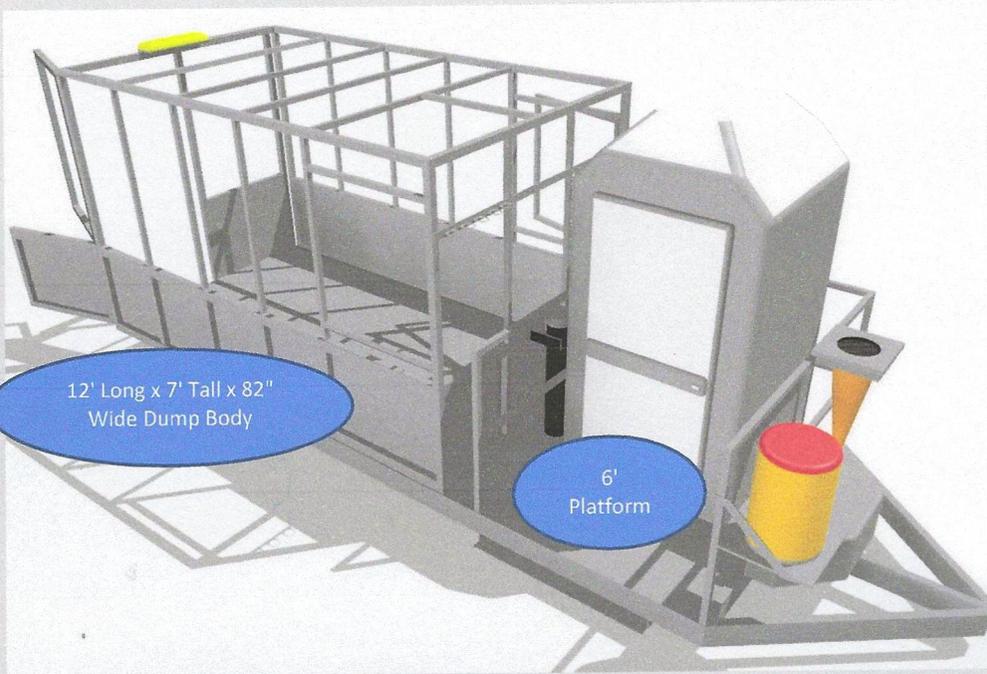


Hand Tool storage Loops

Poly-John Fresh Flush Fleet Model

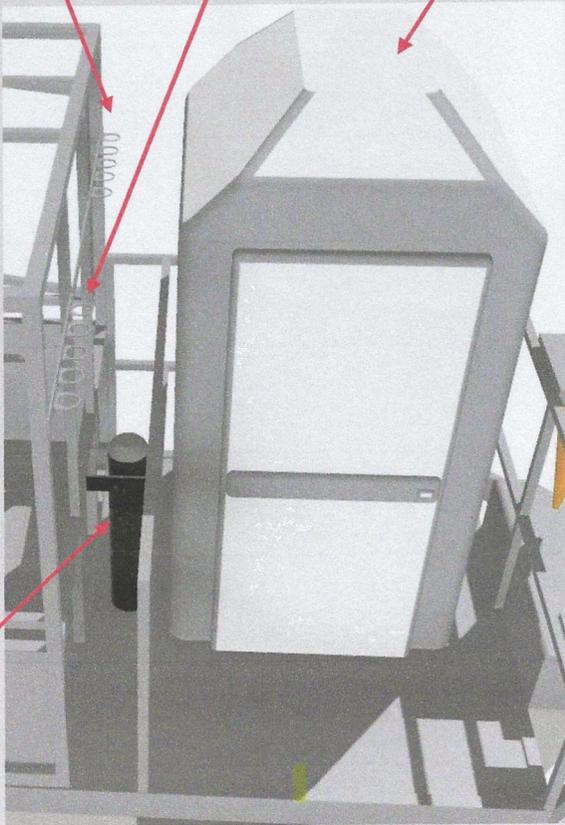


7-Ton telescopic Dump kit

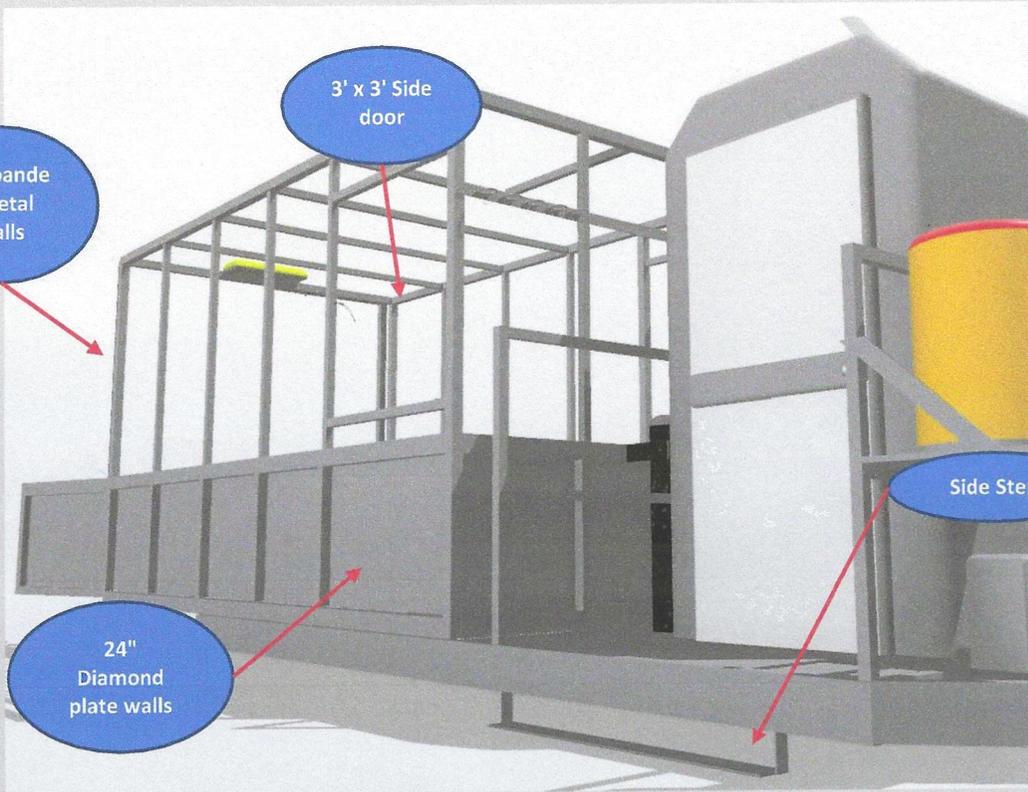


K-Force® Micro Elite 21
TIR LED Mini Light Bar

4 Barn Door
on rear

Diamond plate Deck
crossmember 16" on
Center

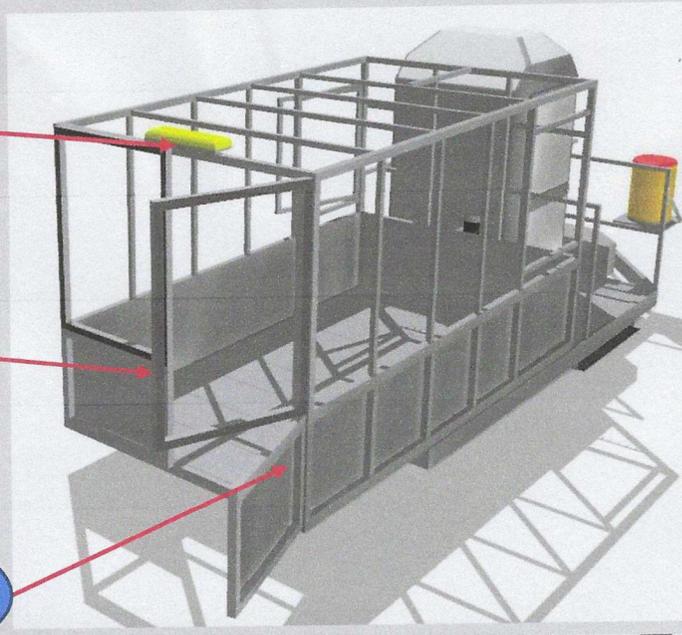

LED Lighting

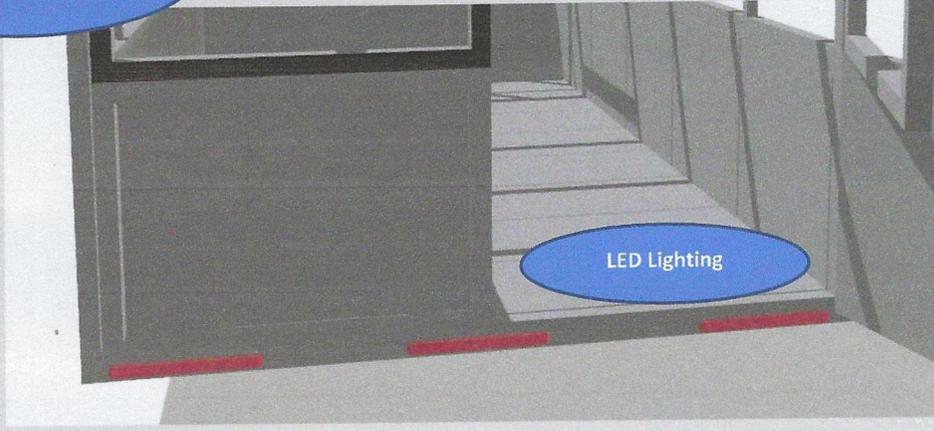

48" Side mounted ramps

Diamond tread Fender
(not in image) located
here

